


SPX-024


2.4kW



- 1** Manual Collimation
- 2** Membrane Key
- 3** AC Type
- 4** Wired Exposure Switch
- 5** Laser Sensor
- 6** Ultrasonic Distance Sensor
- 7** Collimator Rotation
- 8** Handle Angle Status

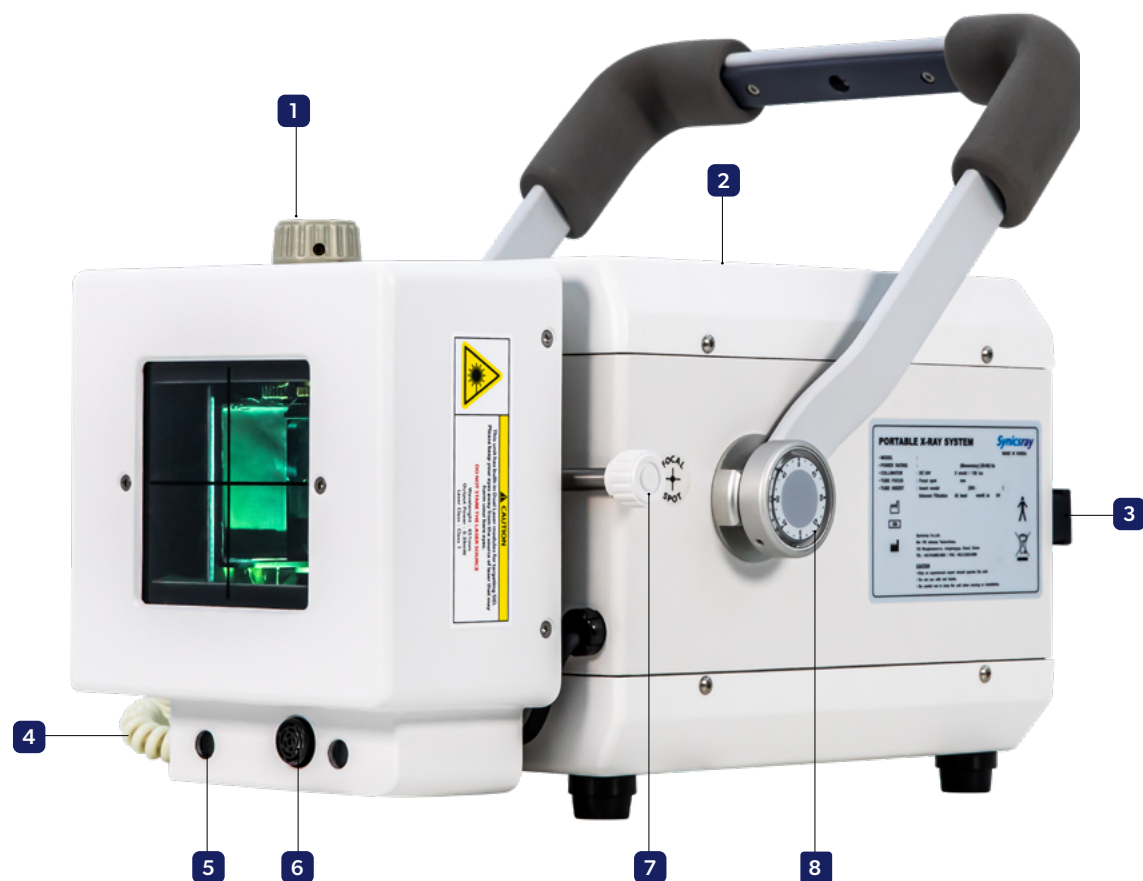

Size

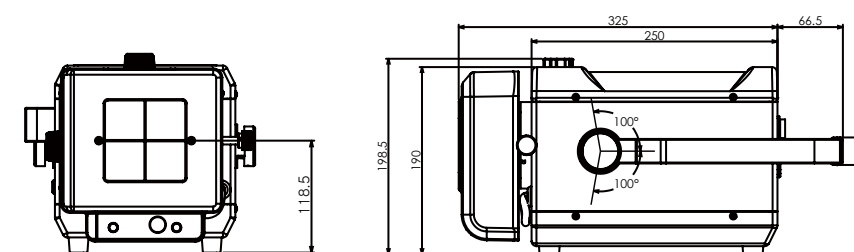

Specification

Type	2.4kW Portable	kV	40kV ~ 100kV (1kV Step)
Max Power	2.4kW	RAD mA	10 ~ 40mA
Input Power	AC	mAs	0.32mAs ~ 100mAs
	120 VAC 22A	Collimator	* Manual control Collimator
	20 ~ 240VAC 18A		* Ultrasonic SID measurement
Tube Type	50Hz / 60Hz		* Laser Point
	Monoblock		* kV, mAs, APR control
X-Ray Tube	Canon	Operation Panel	Membrane Key
	D-125	Movement	Manual movement
	Focal 0.8mm	Other	Wired exposure switch